



# Ka-BAND TEST TRANSLATORS

## For Outdoor Applications



### FEATURES

- Minimum amplitude and delay distortion
- High frequency stability
- Low intermodulation distortion
- Digitally controlled 30 dB level control in 0.2 dB steps
- Low phase noise contribution
- Control via RS232/RS485 remote
- Time-stamped alarm history
- Summary alarm

### OPTIONS

- 60 dB total level control
- Input filtering
- 5/10 MHz external reference
- Higher frequency stability
- Pressurized enclosure
- Control via RS422 remote

This series of test translators provides Ka-band transmit/receive conversions. The rugged package allows mounting in an outdoor environment. This translator is designed for applications where frequency translation is needed with a minimum of amplitude and delay distortion.

In addition to an RS485 or RS422 remote monitor and control port, each unit has an RS232 local control port. A robust feature set is provided with the local control software that communicates with the translator via a COM port on an IBM compatible PC.

## SPECIFICATIONS


Model Number	Input Frequency (GHz)	Output Frequency (GHz)	LO Frequency (GHz)
DN-W2-28.25-17.95	28.0 – 28.5	17.7 – 18.2	10.3
DN-W2-28.75-18.45	28.5 – 29.0	18.2 – 18.7	10.3
DN-W2-29.25-18.95	29.0 – 29.5	18.7 – 19.2	10.3
DN-W2-29.75-19.45	29.5 – 30.0	19.2 – 20.2	10.3
DN-W2-28.5-18.2	28.0 – 29.0	17.7 – 18.7	10.3
DN-W2-29.5-19.2	29.0 – 30.0	18.7 – 19.7	10.3
DN-W2-28.25-18.45	28.0 – 28.5	18.2 – 18.7	9.8
DN-W2-28.75-18.95	28.5 – 29.0	18.7 – 19.2	9.8
DN-W2-30.25-20.45	30.0 – 30.5	20.2 – 20.7	9.8
DN-W2-30.75-20.95	30.5 – 31.0	20.7 – 21.2	9.8
DN-W2-28.5-18.7	28.0 – 29.0	18.2 – 19.2	9.8
DN-W2-29.5-19.7	29.0 – 30.0	19.2 – 20.2	9.8
DN-W2-30.5-20.7	30.0 – 31.0	20.2 – 21.2	9.8

Control accessories:  
HCT-100 (Weather resistant hand-held controller)  
RCT-100 (19" Rack-mount remote control panel)

### FUNCTIONAL

Type .....	Single conversion	
Conversion loss .....	15 dB maximum, 18 dB maximum with Option 1 or 2	
Amplitude response .....	±0.25 dB over any 40 MHz band ±1 dB over output frequency band	
Frequency stability .....	±5 x 10 <sup>-6</sup> , -40 to +60°C (higher stability option available)	
Return loss .....	18 dB minimum/50 ohms	
Level control .....	30 dB in 0.2 dB steps	
Intermodulation distortion .....	With two inband input signals at -15 dBm, third order intermodulation products are less than 50 dBc.	
Input/output isolation .....	60 dB minimum	
Signal independent spurious outputs .....	All spurious signals harmonically related to LO shall be -25 dBm maximum.	
Phase noise (1.0 Hz bandwidth) .....	<u>Offset</u>	<u>Typical level</u>
	100 Hz	-67 dBc/Hz
	1 kHz	-93 dBc/Hz
	10 kHz	-100 dBc/Hz
	100 kHz	-104 dBc/Hz
	1 MHz	-120 dBc/Hz

## FUNCTIONAL BLOCK DIAGRAM

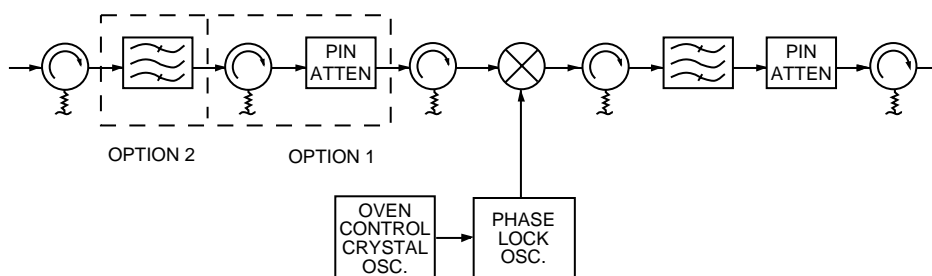

# GENERAL SPECIFICATIONS

## PRIMARY POWER REQUIREMENTS

Voltage ..... 90–250 VAC  
 Frequency ..... 47–63 Hz  
 Power consumption..... 50 W typical

## SUMMARY ALARM

Contact closure/open for DC voltage and/or LO alarm  
 Status alarm readout on remote control bus


## PHYSICAL

Weight ..... 22 pounds typical  
 Connectors  
 RF connector below 26 GHz ..... SMA female compatible  
 RF connector above 26 GHz ..... WR-28 waveguide (see outline for flange detail)  
 External reference input (Option 6) ..... BNC female  
 Status interface mating connector ..... MS3116F12-10S (mating connector supplied)  
 Local control (RS232) interface connector..... MS3116F10-6P (mating connector supplied)  
 AC input connector ..... FCI Clipper series CL1M1102 (mating connector supplied)  
 (Clipper series is interchangeable with MIL-C-5015 and AMP CPC product)


## ENVIRONMENTAL

Operating  
 Ambient temperature ..... -40 to +60°C  
 Atmospheric pressure ..... Up to 10,000 feet  
 Nonoperating  
 Temperature ..... -50 to +70°C  
 Atmospheric pressure ..... Up to 40,000 feet  
 Shock and vibration..... Normal handling by commercial carriers

## OUTLINE DRAWING

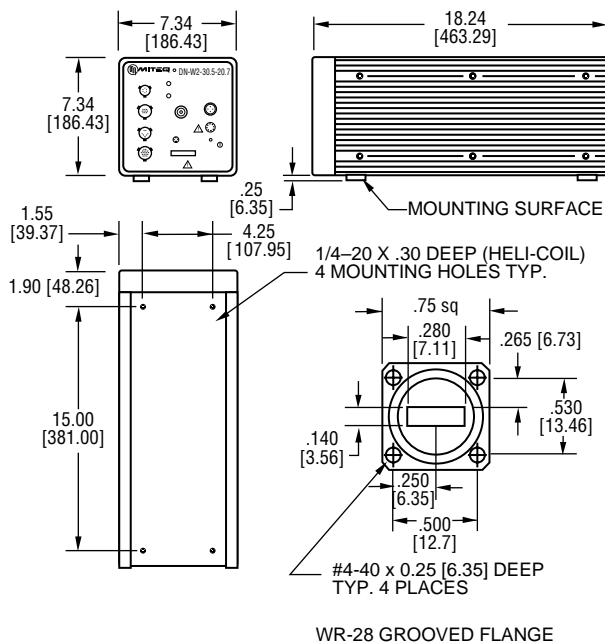


## CONTROL ACCESSORIES

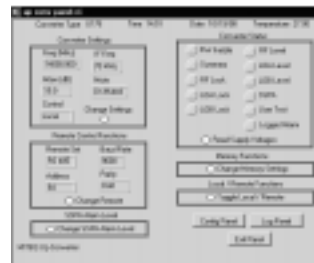

Robust software feature set (supplied as standard)



Weather resistant hand-held control unit MITEQ Model Number HCT-100 (sold separately)



19" Rack-mount control unit, 2RU MITEQ Model Number RCT-100 (sold separately)

NOTE: DIMENSIONS IN [ ] BRACKETS ARE IN MILLIMETERS.

# Ka-BAND TEST TRANSLATORS

## For Outdoor Applications

### OPTIONS

- 1.** 30 dB additional level control.  
60 dB level control in 0.2 dB steps. Independent control of input and output attenuators.
- 2.** Input filter.
- 5.** Higher frequency stability reference.  
 $\pm 1 \times 10^{-6}$ /day, -40 to +60°C. Refer to factory for higher stability options.
- 6.** External reference configuration.  
5 or 10 MHz, +4  $\pm$ 3 dBm. Unit will automatically switch to the internal reference for external reference levels below +1 dBm nominal.  
Internal reference stability is  $\pm 5 \times 10^{-8}$ , -40 to +60°C.
- 17.** Remote control (RS485 is the standard remote control interface).  
**A.** RS422.  
Note: Unit is supplied standard with an additional RS232 communication port.
- 26.** Pressurization.  
Translator enclosure capable of 0.5 PSI.  
Leak rate: 3.0 standard cubic feet per hour maximum.

Notes: Missing option numbers are not applicable to this product.

For more detailed description, refer to MITEQ's Technical Note 25T052.



100 Davids Drive, Hauppauge, NY 11788  
TEL.: (631) 436-7400 • FAX: (631) 436-7431/436-7430  
[www.miteq.com](http://www.miteq.com)